



NB-WL300 Series

Low-cost wireless inclinometer

Technical Manual



Introduction

In response to the demand for remote real-time monitoring and analysis of physical characteristics such as uneven settlement and tilt deformation of the foundations of structures such as dangerous houses, ancient buildings, and various towers, North Microsensing has launched the NB-WH500 high precision wireless tilt sensor after years of research and development, which supports both NB-IoT and GSM network modes. The structure data can be uploaded to the cloud through Narrow Band Internet of Things (NB-IoT) or operator 2G network, and users can evaluate the risk level of single and regional structures through big data analysis to improve management efficiency and emergency response level and avoid losses.

NB-WH500 wireless inclination sensor contains several unique patented technologies of North Microsensing, different from the traditional inclination sensor, this product has built-in high-performance rechargeable lithium battery and disposable dry battery, all internal circuits are optimized design, can automatically enter the low-power sleep mode, the collection frequency can be set by the user, the highest accuracy of 0.003° , once per hour upload data can be continuously. It can be used continuously for 3 years with one data upload per hour. In addition, the NB-WH500 has excellent long-term stability and zero point drift, which is very popular among customers.

Feature

- Accuracy: 0.1°
- Cross axis error is less than 0.1°
- Automatic photovoltaic charging
- Resolution: 0.01°
- Dual axis measurement, range $\pm 90^\circ$
- NB and GSM automatically adapt

Application

- Dangerous housing monitoring
- Bridge tower inclination measurement
- Dam monitoring
- Slope disaster prevention
- Ancient building protection monitoring
- Tunnel monitoring
- Foundation pit inclinometer
- Tower tilt monitoring

Product Feature



Mechanical properties

Connector	Aviation connector
Protection level	IP68(1 m water depth, 24 hours continuous test)
Shell material	ABS+30% glass fiber + magnesium aluminum alloy anodized base
Installation	Four M6 screws



Performance index

Measurement range(°)	Condition	±90
Measurement axis	Mutually perpendicular	X-Y
Accuracy(°)	Room temperature	0.1
Resolution(°)		0.01
Zero temperature drift (°/°C)	-40 ~ 85°C	±0.01
Cross axis error (°)	25°C	0.1
Automatic sleep mode	Support	
Timed wake up	Support	
Exercise wake	Support	
Mean time between failures MTBF	≥90000 h	
Electromagnetic compatibility	According to GBT17626	
Insulation resistance	≥100 MΩ	
Impact resistance	2000g, 0.5ms, 3 times/axis	
Dimension	L105.2*W85*H76 (mm) (Antenna not included)	
Weight	/	

Resolution: The smallest change value of the measured value that the sensor can detect and distinguish within the measurement range.

Accuracy: The root mean square error of the actual angle and the sensor measuring angle for multiple (≥16 times) measurements.




Electrical index

Power connector	Power voltage	4.2VDC
	Disposable dry cell voltage	3.6VDC
	Working current	50mA (Average value)
	Stand-by current	6 μ A(Typical values)
	Rechargeable battery capacity	6000mAH
	Disposable dry cell battery capacity	19000mAH
Communication distance	Maximum: 5Km	
Limited Data	Every frame 20Byte	
Reliability	The mean time between failures (MTBF) is not less than 50,000 hours Ultra-low power consumption design, including automatic sleep mode, timing wake-up, sports wake-up	



Network topology

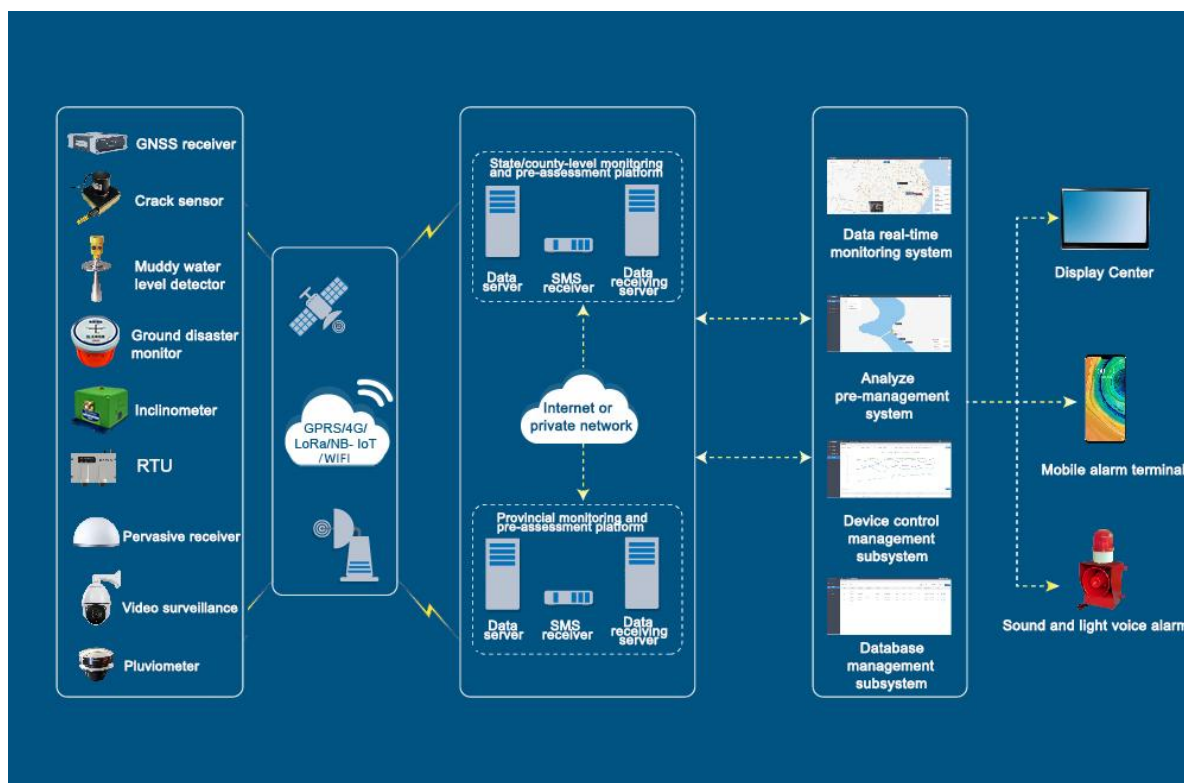



Package product size

Product size: (Antenna not included) L105.2*W85*H76 (mm) , the length and width may be a 1mm error, please refer to the actual product


Standard antenna height: 45mm (this product without antenna cap)



Electrical connections

Aviation plug wiring definition


	RED	BLACK	GREEN	YELLOW
Wiring color	1	3	4	5
function	4.2V	GND	RXD	TXD

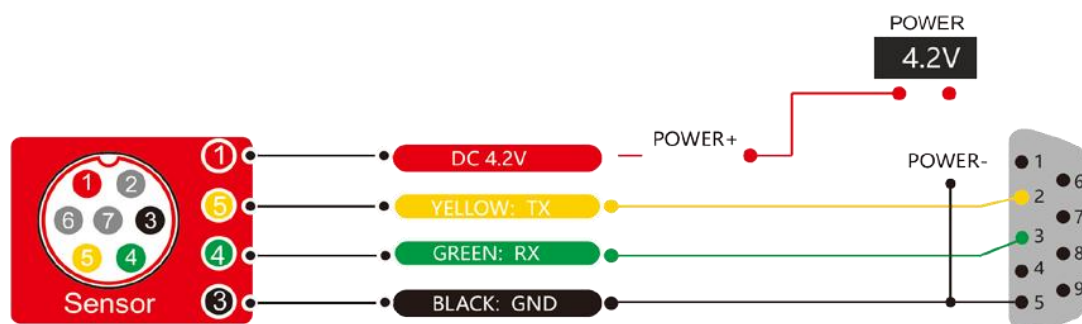


Installation

This series of products can only be installed vertically (pendulum type measurement), not horizontally. The correct installation method can avoid measurement errors. The following points should be done when installing the sensor:

First of all, make sure that the sensor mounting surface is completely close to the measured surface, and the measured surface should be as level as possible, and there should be no included angles as shown in Figure A and Figure C. The correct installation method is shown in Figure B and Figure D.

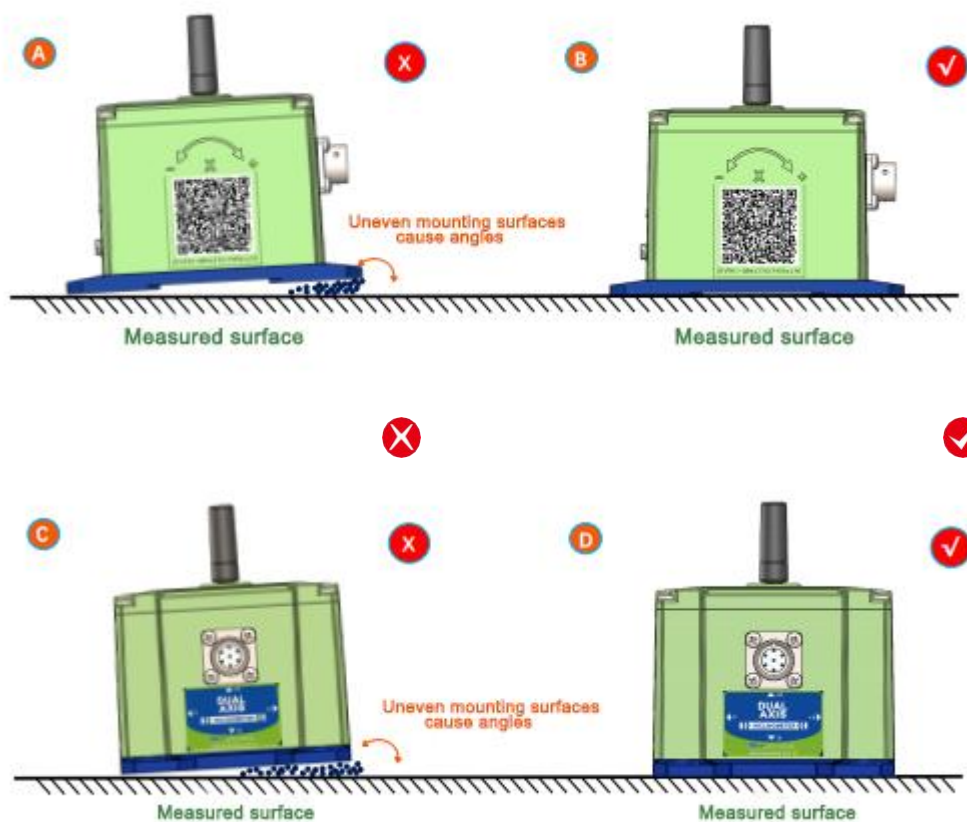

Secondly, the bottom line of the sensor and the axis of the measured object cannot have an angle as shown in Figure E, and the bottom line of the sensor should be kept parallel or orthogonal to the axis of rotation of the measured object during installation. This product can be installed horizontally or vertically (vertical installation needs to be customized), and the correct installation method is shown in Figure F.

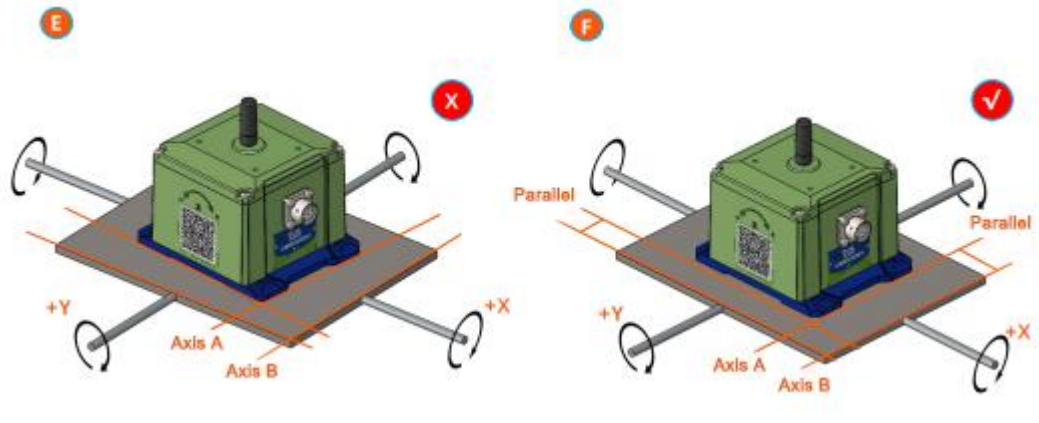

Finally, the mounting surface of the sensor and the surface to be measured must be tightly fixed, smooth in contact, and stable in rotation, and measurement errors due to acceleration and vibration must be avoided.

Executive standard

- Enterprise Quality System Standard: ISO9001:2015 Standard (Certificate No.064-21-Q-3290-RO-S)
- CE certification (certificate number: M.2019.103. U Y1151)
- ROHS (certificate Number: G 190930099)
- GB/T 191 SJ 20873-2003 General specification for inclinometer and level
- GBT 18459-2001 The calculation method of the main static performance index of the sensor
- JJF 1059.1-2012 Evaluation and expression of measurement uncertainty
- GBT 14412-2005 Mechanical vibration and shock Mechanical installation of accelerometer
- GJB 450A-2004 General requirements for equipment reliability
- GJB 909A Quality control of key parts and important parts
- GJB899 Reliability appraisal and acceptance test
- GJB150-3A High temperature test
- GJB150-4A Low temperature test
- GJB150-8A Rain test
- GJB150-12A Sand and dust experiment
- GJB150-16A Vibration test
- GJB150-18A Impact test
- GJB150-23A Tilt and rock test
- GB/T 17626-3A Radio frequency electromagnetic field radiation immunity test
- GB/T 17626-5A Surge (impact) immunity test
- GB/T 17626-8A Power frequency magnetic field immunity test
- GB/T 17626-11A Immunity to voltage dips, short-term interruptions and voltage changes
- GB/T 2423.22-2012 Environmental Test Part 2: Test Method Test N: Temperature Change (IEC 60068-2-14:2009, IDT)
- GB/T 10125-2012 Artificial atmosphere corrosion test Salt spray test (ISO 9227:2006,IDT)

NB-WL300 Series

Low-cost Wireless Inclinator

Wuxi Bewis Sensing Technology LLC

Add: Building 30, NO. 58, Xiuxi Road, Binhu District,
Wuxi City, Jiangsu Province, China

Tel: +86 18921292620

Mail: sales@bwsensing.com

Web: www.bwsensing.com